

FEATURES


- To reduce salt debris and chemical deposition at the injection point
- Easy removal in high pressure systems
- PVDF or PP body

TECHNICAL DATA

LINI-V / LINI-D

1/2" injection lance.



	LINI-V	LINI-D
Threads	1/2"	1/2"
Max pressure	16 bar (2 bar)	16 bar (3 bar)
Max temperature	25°C (140°C)	25°C (60°C)
Max flow	10 l/h	10 l/h
Body	PVDF	PP
O-Rings	FKM B	EP

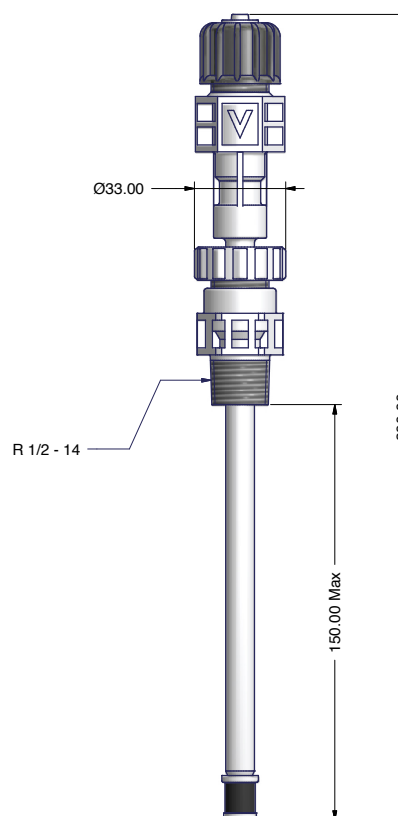

LINIR-V / LINIR-D

1/2" injection lance for easy removal in high pressure systems.
With ball valve.


	LINIR-V	LINIR-D
Threads	1/2"	1/2"
Max pressure	16 bar (3 bar)	16 bar (3 bar)
Max temperature	25°C (60°C)	25°C (60°C)
Max flow	10 l/h	10 l/h
Body	PVDF	PP
Ball valve	PVC	PVC
O-Rings	FKM B	EP

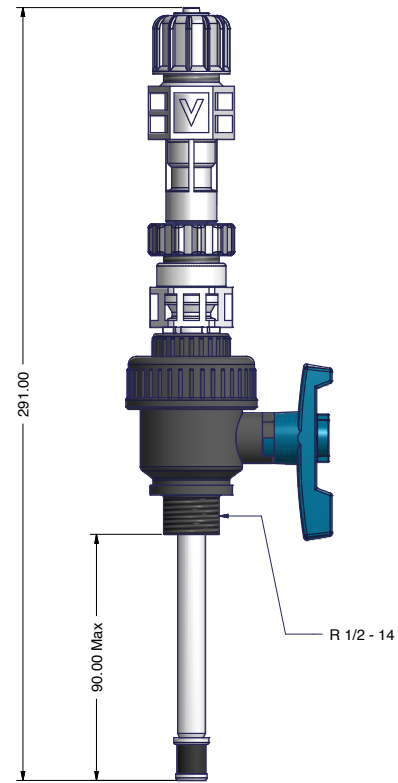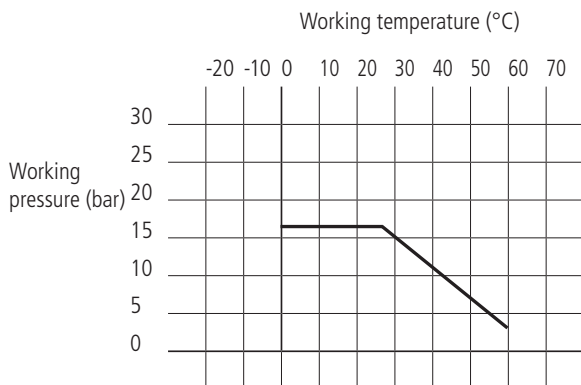


LINIR-K

1/2" injection lance for easy removal in high pressure systems.
With PVDF ball valve.

	LINIR-K
Threads	1/2"
Max pressure	16 bar (2 bar)
Max temperature	25°C (140°C)
Max flow	10 l/h
Body	PVDF
Ball valve	PVDF
O-Rings	FKM B

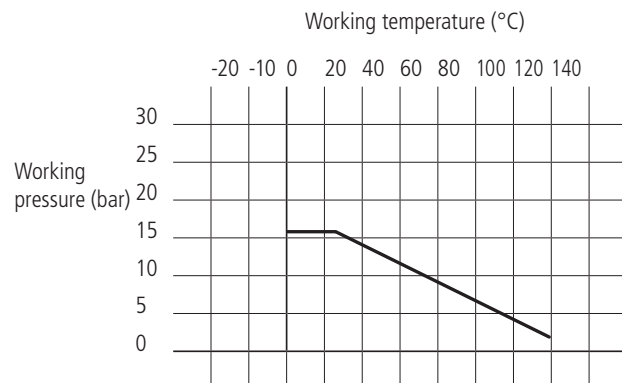


SET UP

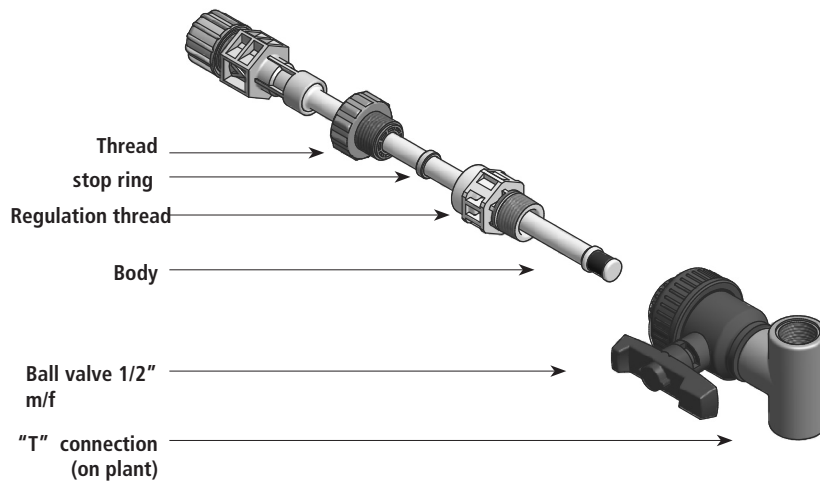

PIC. 1.

- Prepare injection lance as shown on pic. 1.
- Insert body lance inside the ball valve (must be closed). Lock the nut. Warning: check the connections for water leak.
- Open the ball valve and push the body until it reached the middle of "T" connection.
- Lock the ring on the nut as shown on pic. 2 to avoid that water pressure ejects the lance.

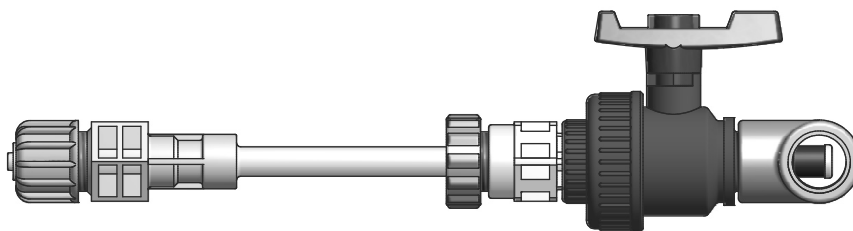

PIC. 2.