



FEATURES

- To reduce salt debris and chemical deposition at the injection point
- Easy removal in high pressure systems
- PVDF or PP body
- On request, extension available in three different length: 5 cm, 10 cm and 15 cm.

TECHNICAL DATA


LINI-V / LINI-D

1/2" injection lance.

	LINI-V	LINI-D
Threads	1/2"	1/2"
Max pressure	16 bar (2 bar)	16 bar (2 bar)
Max temperature	25°C (110°C)	25°C (130°C)
Max flow	10 l/h	10 l/h
Body	PVDF	PP
O-Rings	FKM B	EP

3/4" injection lance.

	LINI-V	LINI-D
Threads	3/4"	3/4"
Max pressure	10 bar (2 bar)	10 bar (2 bar)
Max temperature	25°C (110°C)	25°C (110°C)
Max flow	120 l/h	120 l/h
Body	PVDF	PVDF
O-Rings	FKM B	FKM B

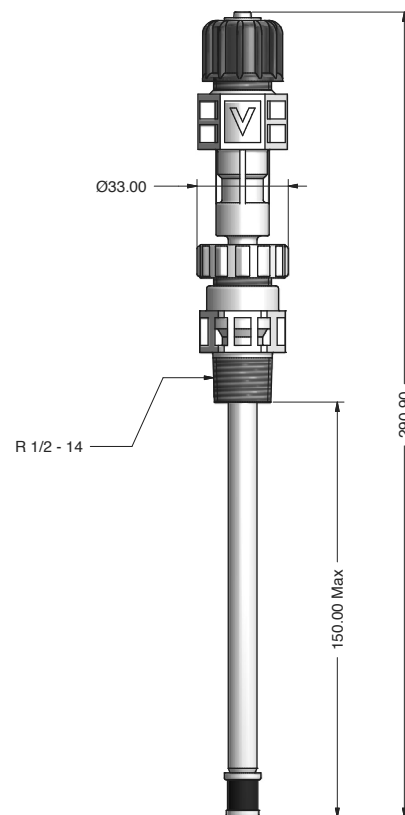


LINIR-V / LINIR-D

1/2" injection lance for easy removal in high pressure systems.
With ball valve.

	LINIR-V	LINIR-D
Threads	1/2"	1/2"
Max pressure	16 bar (3 bar)	16 bar (3 bar)
Max temperature	25°C (50°C)	25°C (50°C)
Max flow	10 l/h	10 l/h
Body	PVDF	PP
Ball valve	PVC	PVC
O-Rings	FKM B	EP



	LINIR-V	LINIR-D
Threads	3/4"	3/4"
Max pressure	10 bar (3 bar)	10 bar (3 bar)
Max temperature	25°C (50°C)	25°C (50°C)
Max flow	120 l/h	120 l/h
Body	PVDF	PVDF
Ball valve	PVC	PVC
O-Rings	FKM B	EP

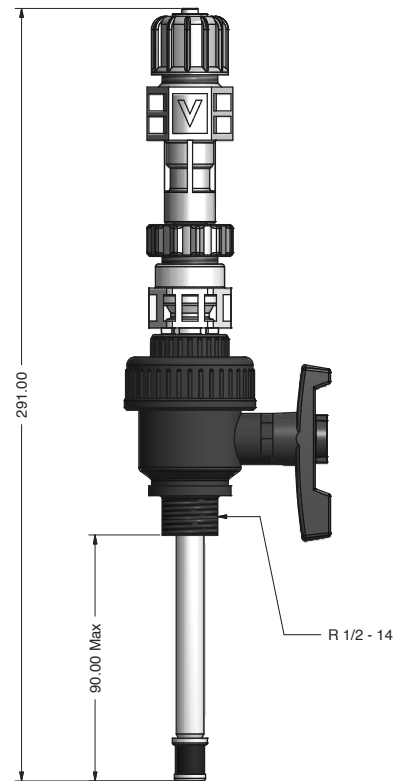

LINIR-K

1/2" injection lance for easy removal in high pressure systems.
With PVDF ball valve.


	LINIR-K	LINIR-K
Threads	1/2"	3/4"
Max pressure	16 bar (2 bar)	10 bar (2 bar)
Max temperature	25°C (110°C)	25°C (110°C)
Max flow	10 l/h	120 l/h
Body	PVDF	PVDF
Ball valve	PVDF	PVDF
O-Rings	FKM B	FKM B / EP

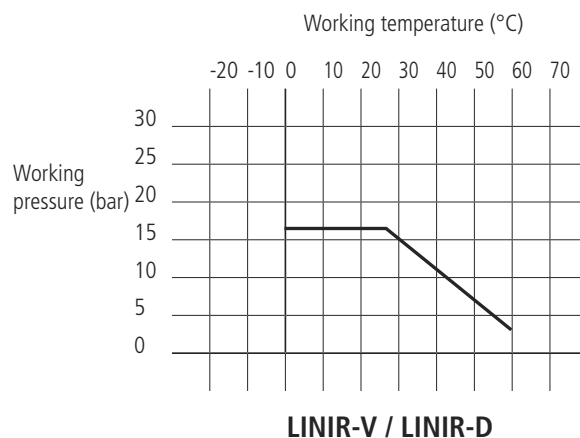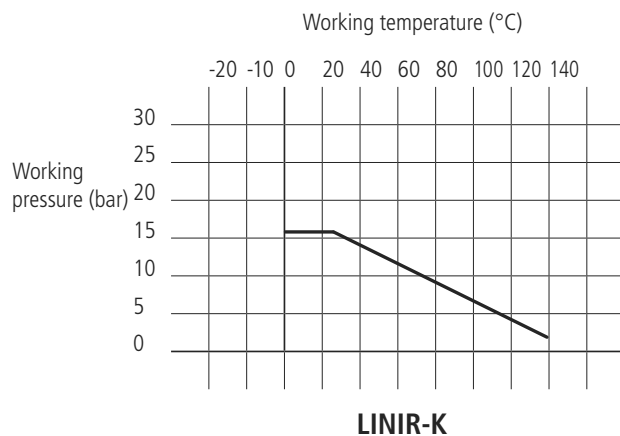

LINI-SS

Injection lance in stainless steel (stainless steel balls) to remove the injection valves with the pressure pipe.

	LINI-SS-V	LINI-SS-D
Connections	1/2"	1/2"
Max pressure	25 bar	25 bar
Max temperature	200°C	150°C
Max flow	10 l/h	10 l/h
Body	SS	SS
O-Rings	FKM B	Propylene ethylene

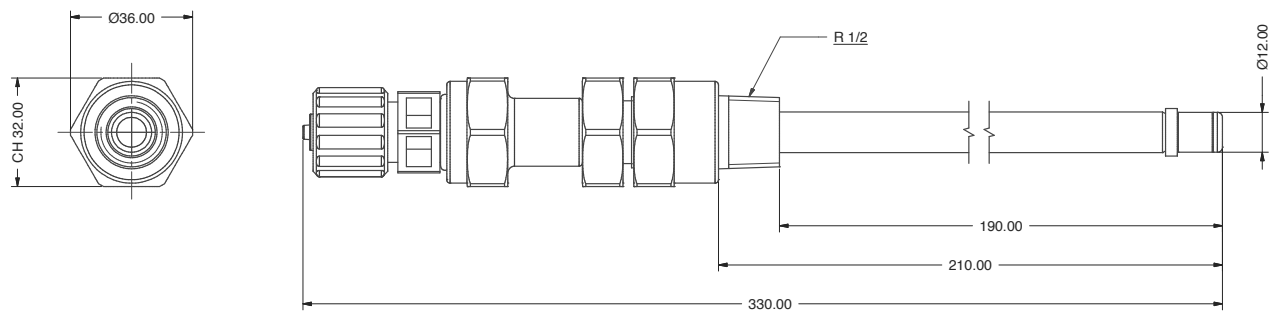

Data Sheet

PIC. 1.

