



	LINI-V	LINI-D	LINIR-K	LINIR-V	LINIR-D
Thread	1/2"	1/2"	1/2"	1/2"	1/2"
Max Pressure	16 bar (2 bar)	16 bar (3 bar)	16 bar (2 bar)	16 bar (3bar)	16 bar (3bar)
Max Temp	25°C (140°C)	25°C (70°C)	25°C (140°C)	25°C (50°C)	25°C (50°C)
Max Flow	10 l/hr	10 l/hr	10 l/hr	10 l/hr	10 l/hr
Body	PVDF	PP	PVDF	PVDF	PP
Ball valve	No Ball Valve	No Ball Valve	PVDF	PVC	PVC
Hose fitting	6x4 tube	6x4 tube	6x4 tube	6x4 tube	6x4 tube
O-Rings	FKM B	EPDM	FKM B	FKM B	EPDM
Overall Length	290.9	290.9	291	291	291
Insertion Depth	150	150	90	90	90

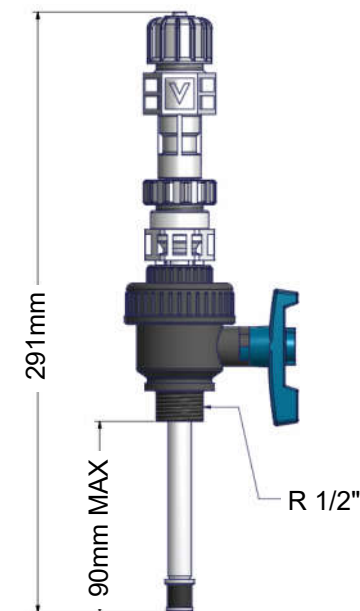

	LINI-V 3/4 8x12	LINI-D 3/4 8x12	LINIR-K 3/4 8x12	LINIR-V 3/4 8x12	LINIR-D 3/4 8x12
Thread	3/4"	3/4"	3/4"	3/4"	3/4"
Max Pressure	10 bar (2 bar)	10 bar (2 bar)	10 bar (2 bar)	10 bar (3 bar)	10 bar (3 bar)
Max Temp	25°C (100°C)	25°C (100°C)	25°C (100°C)	25°C (50°C)	25°C (50°C)
Max Flow	120 l/hr	120 l/hr	120 l/hr	120 l/hr	120 l/hr
Body	PVDF	PVDF	PVDF	PVDF	PVDF
Ball valve	No Ball Valve	No Ball Valve	PVDF	PVC	PVC
Hose fitting	8x12 tube	8x12 tube	8x10 tube	8x10 tube	8x10 tube
O-Rings	FKM B	EPDM	FKM B	FKM B	EPDM
Overall Length	389	389	389	389	389
Insertion Depth	191	191	108	108	108

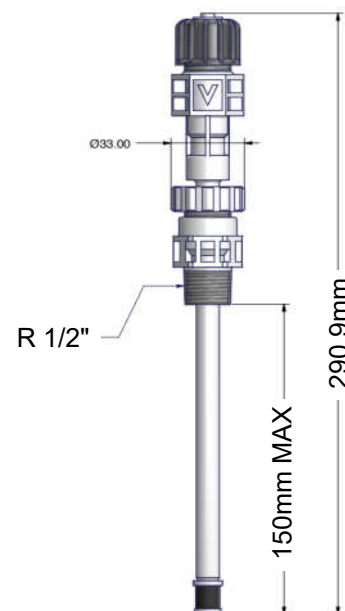