



	LINI-V	LINI-D	LINIR-K	LINIR-V	LINIR-D
Thread	1/2"	1/2"	1/2"	1/2"	1/2"
Max Pressure	16 bar (2 bar)	16 bar (3 bar)	16 bar (2 bar)	16 bar (3bar)	16 bar (3bar)
Max Temp	25°C (140°C)	25°C (70°C)	25°C (140°C)	25°C (50°C)	25°C (50°C)
Max Flow	10 l/hr	10 l/hr	10 l/hr	10 l/hr	10 l/hr
Body	PVDF	PP	PVDF	PVDF	PP
Ball valve	No Ball Valve	No Ball Valve	PVDF	PVC	PVC
Hose fitting	6x4 tube	6x4 tube	6x4 tube	6x4 tube	6x4 tube
O-Rings	FKM B	EPDM	FKM B	FKM B	EPDM
Overall Length	290.9	290.9	291	291	291
Insertion Depth	150	150	90	90	90

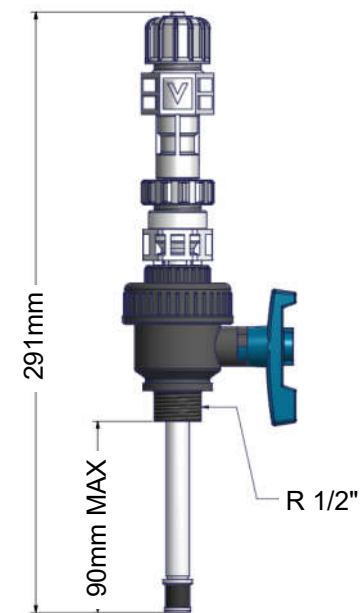

	LINI-V 3/4 8x12	LINI-D 3/4 8x12	LINIR-K 3/4 8x12	LINIR-V 3/4 8x12	LINIR-D 3/4 8x12
Thread	1"	1"	1"	1"	1"
Max Pressure	10 bar (2 bar)	10 bar (2 bar)	10 bar (2 bar)	10 bar (3 bar)	10 bar (3 bar)
Max Temp	25°C (100°C)	25°C (100°C)	25°C (100°C)	25°C (50°C)	25°C (50°C)
Max Flow	120 l/hr	120 l/hr	120 l/hr	120 l/hr	120 l/hr
Body	PVDF	PVDF	PVDF	PVDF	PVDF
Ball valve	No Ball Valve	No Ball Valve	PVDF	PVC	PVC
Hose fitting	8x12 tube	8x12 tube	8x10 tube	8x10 tube	8x10 tube
O-Rings	FKM B	EPDM	FKM B	FKM B	EPDM
Overall Length	389	389	389	389	389
Insertion Depth	191	191	108	108	108

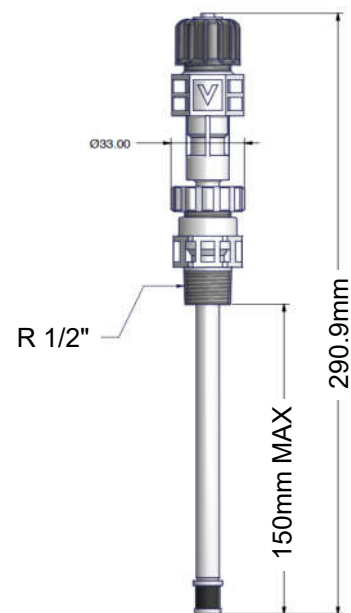