



Accessories & Other Equipment

Brominators (BCDMH Feeders)

Ordering Code	Description
BROM-18	Brominator with inlet & drain valves 18kg capacity, 3.5 bar
BROM-26	Brominator with inlet & drain valves 26kg capacity, 3.5 bar
BROM-100	Brominator with inlet & drain valves 100kg capacity, 2.5 bar
BROM-T-09	Transparent Brominator 9kg capacity, 5.5 bar
BROM-T-23	Transparent Brominator 23kg capacity, 5.5 bar
BROM-T-34	Transparent Brominator 34kg capacity, 5.5 bar

Description

Brominators (BCDMH) feeders) are PP or PVC moulded canisters that are designed to house BCDMH briquettes whilst water passes through, slowly dissolving the briquettes, to create bromine water. The flow of water through the brominator usually cycles on & off via an optional solenoid valve controlled by a timer or ORP controller.

Common applications are disinfection of water in cooling towers, swimming pools, spas, irrigation systems & fountains.

Features & Benefits

- Robust PP or PVC body with PVC fittings
- Drain valve on inlet with filter to prevent briquette chunks from blocking drain valve open
- Air-bleed valve to release pressure
- Centre outlet ensures brominator remains full when not operating with no dispensing of bromine water
- Secure lid to prevent tampering




BROM-26



BROM-100

Dimensional Drawings

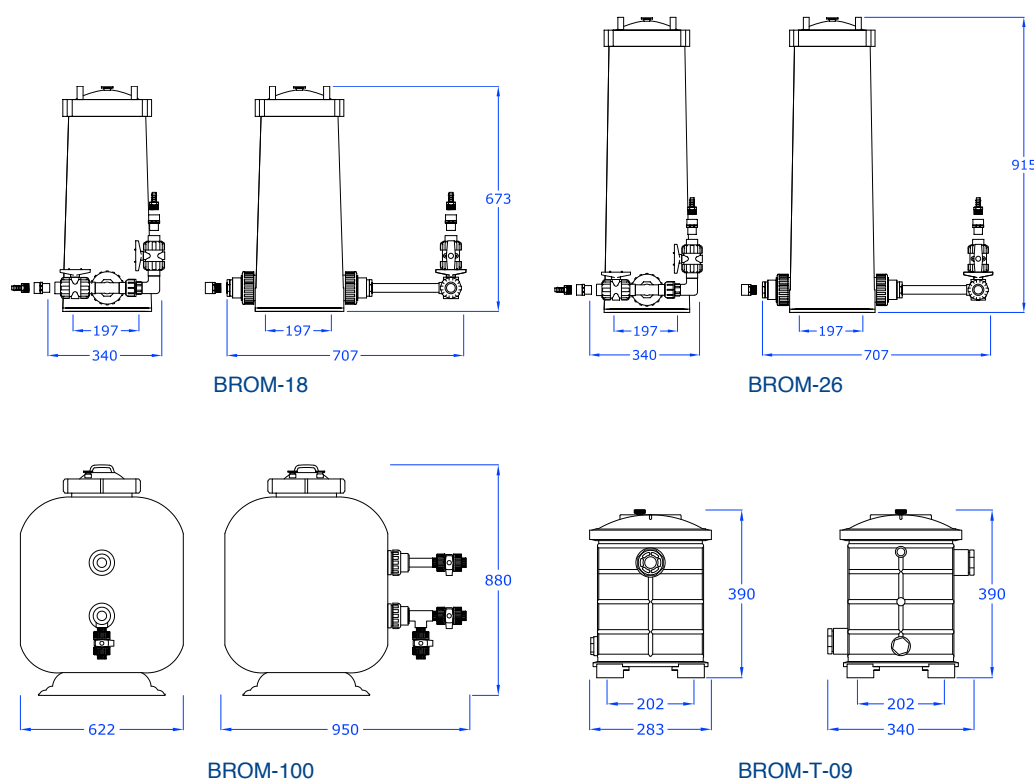


BROM-T-09

BROM-T-23



BROM-T-34

Dimensional Drawings

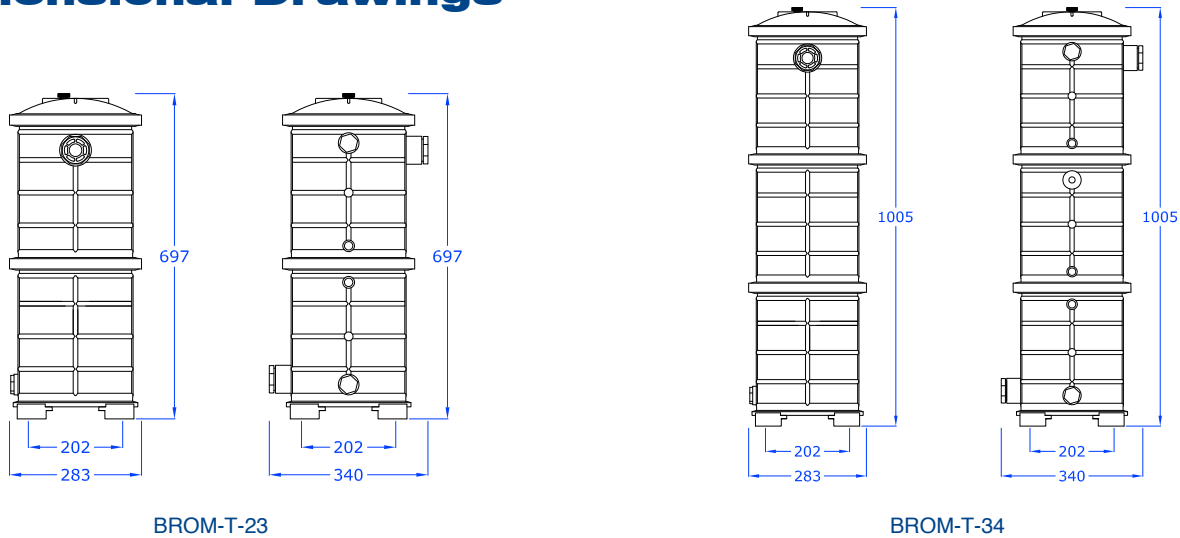

Spare Parts: BROM-18/26/100

Ordering Code	Description
SP-BROM-LIDG	Grey Lid for Brominator models BROM-18, BROM-26
SP-BROM-LIDT	Transparent Lid for Brominator model BROM-100
SP-BROM-LLR1	Spare 8" lockring for Brominator models BROM-18, BROM-26 & BROM-100
SP-BROM-LR1-FP	Lid O-Ring Viton for Brominator models BROM-18, BROM-26, BROM-32 & BROM-100
SP-BROM-LR2	Air Release Valve O-Ring Viton for Brominator models BROM-18, BROM-26 & BROM-100
SP-BROM-MAN-IN	Replacement inlet manifold for brominator, incl half barrel union, filter, ball valves and hosedails for BROM-18 & BROM-26 only
SP-BROM-MAN-OUT	Replacement outlet manifold for brominator, incl half barrel union, reducer and female 3/4 threaded adaptor for BROM-18 & BROM-26 only
SP-BROM-PG-800	Pressure gauge 50mm, side mount 1/4" BSP, 0-800kPa

Spare Parts: BROM-T Series

Ordering Code	Description
SP-BROM-LID	Transparent lid for transparent brominators (threaded vent plug, gasket & clamp excluded)
SP-BROM-T-CLAMP	Stainless Steel Clamp for Transparent Brominator BROM-T
SP-BROM-T-GASKET-V	Viton Gasket for BROM-T transparent brominators for fitment between body sections or between body and lid
SP-BROM-T-FOOT	Grey PVC Mounting foot for BROM-T transparent Brominator (excludes affixing bolt)
SP-BROM-T-RBUSH	Grey PVC Threaded Reducing bush for inlet or outlet of Transparent BROM-T brominator 1-1/2" Male x 3/4" Female
SP-BROM-T-WRENCH	Black clamp wrench for handtightening SS clamps on BROM-T transparent brominators

Specifications

	BROM-18 BROM-26	BROM-100	BROM-T-09 BROM-T-23 BROM-T-34
Capacity	18 or 26 Kg	100 Kg	9, 23 or 34 Kg
Body Material	PP	Fibreglass	PVC
Max Operating Pressures and Temperatures	3.5 Bar at 50°C	2.5 Bar at 50°C	5.5 Bar at 25°C or 4.5 Bar at 50°C