


## FEATURES

- Instrument operated by a rotation "Encoder"
- Flow control input
- pH range: 0-14 pH
- PT100 Temperature probe
- pH probe
- Stand-by input
- Probe alarm (probe check-up)
- Max dosing time alarm
- Threshold alarm
- Level alarm
- Flow alarm
- SMS alarm sending (as option)
- Ethernet connection to email alarm condition (as option)
- Programmable delay at dosing startup (max 60 minutes)
- Temperature and pH compensation
- Service Menù for real time probe reading
- Real time internal clock
- Working modes: on/off, impulsive proportional, proportional PWM and fixed PWM
- Automatic or manual dosing activity
- Data log storage on USB device (as option)
- mA outputs (as option)

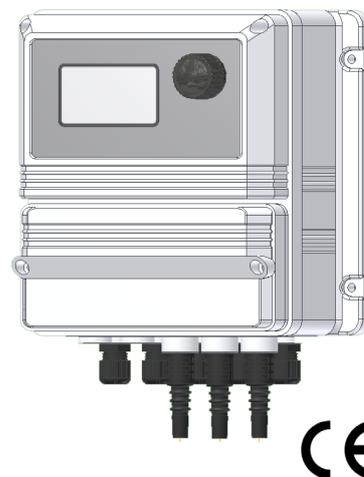

Microprocessor digital regulator for double pH with temperature reading.

On/Off, impulsive proportional, proportional PWM or fixed PWM working modes.

In On/Off working mode, a "STK Speed" function let the pumps operate at pulses per minutes for a set time (1 pulse every x minutes) to provide a reaction time.

### INPUT:

- Stand-by
- Flow
- pH1 level
- pH2 level
- pH3 level
- Double pH probe
- Temperature probe
- Power supply

### OUTPUT:

- 3 proportional impulsive (pH)
- 2 Proportional on/off (pH)
- General alarm
- mA output (pH and temperature) as option

## ELECTRICAL

### INPUT SIGNAL

BNC (pH)

### ON/OFF OUTPUT

2 relays; 5A @ 230 VAC  
(fuse protected)

### ALARM OUTPUT

85 / 264VAC

### POWER SUPPLY

90 / 265 VAC; 50/60 Hz

### PROPORTIONAL OUTPUT

Pulse output signal,

### STAND-BY

1 contact input

### AVERAGE CONSUMPTION

25 W


open collector

0-180 pulses per minute


### RS485 OUTPUT

1 RS485 output  
(optional)

## DIMENSIONS

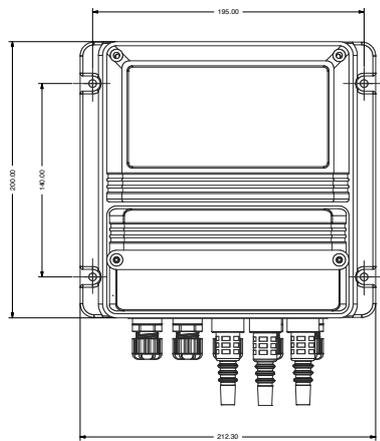

FRONT

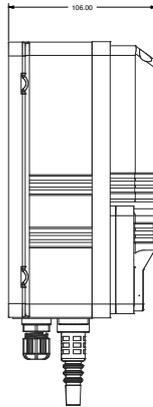

SIDE

## ENCLOSURE

IP65 enclosure (NEMA4x).

LDPPH control instruments are manufactured in ABS housing to ensure protection against aggressive chemicals and tough environment.

## ENVIRONMENT

-10°C / 50°C (14°F / 122°F)

0/95% (non condensing) relative humidity

## PH PROBE - TEMPERATURE PROBE

PH PROBE	
EPHS	0-14 pH
TEMPERATURE PROBE	
ETEPT	0-100° C